

	Moduli DIN (17,5 mm) DIN Modules (17,5 mm) Modules DIN (17,5 mm) DIN Moduln (17,5 mm) Módulos DIN (17,5 mm)	AxBxC		Potenza dissipabile (W)* Dissipate heat power(W)* Puissance qu'on peut dissiper (W)* Wärmeabführvermögen(W)* Potencia disipable (W)*	Colore Couleur Couleur Farbe Color	Confezione imballo Pack quantity Conditionnement Verpackung Unidades de embalaje	Articolo Article Article Artikel Articulo
		Dimensioni (mm) Dimensions (mm) Dimensions (mm) Dimensionen (mm) Dimensiones (mm)	(mm)				
4 DIN	4+1/2 (4+1/2)	180x150x75	17W		1	675.2104 (*) 675.2104B	
	8+1 (8+1)	210x254x75	21W		1	675.2008 675.2008B	
12 DIN	12+1 (12+1)	270x326x75	32W		1	675.2012 675.2012B	
	24+4 (12+2)-(12+2)	420x326x95	52W(74W▲)		1	675.4024 675.4024B	
18 DIN	18+1 (18+1)	270x434x75	36W		1	675.2018 675.2018B	
	36+4 (18+2)-(18+2)	420x434x95	61W		1	675.4036 675.4036B	
	54+3 (18+1)-(18+1)-(18+1)	570x434x95	71W		1	675.5054 675.4036B	

\* Potenza calcolata in conformità alla norma CEI 23-49

\* Dissipable power calculated in conformity with CEI 23-49

\* Puissance pouvant être dissipée, calculée conformément à la norme CEI 23-49

\* Aufnehmbare Leistung, berechnet in Übereinstimmung mit Bestimmung CEI 23-49

\* Potencia disipable calculada conformemente a la norma CEI 23-49

• Senza portella

• Without window

• Sans fenêtrés

• Ohne scheinle

• Sin ventanas



▲ 2 centralini sovrapposti verticalmente

▲ N. 2 gearcases vertically superposed

▲ 2 distributeurs superposés verticalement

▲ 2 vertikal einander überlagernde Steuergehäuse


▲ 2 centralitas superpuestas verticalmente

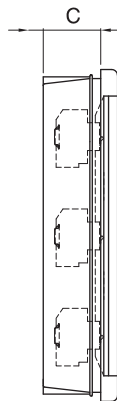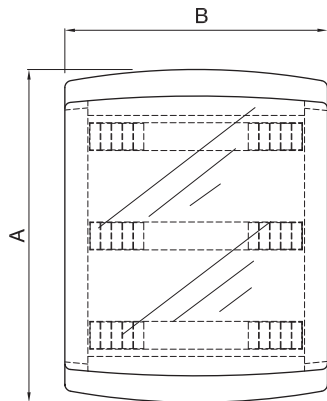


4 DIN




8 DIN




12 DIN




24 DIN



18 DIN




36 DIN



54 DIN

Centralino da incasso  
Flush mtg. enclosure  
Boîtes d'encastrement  
Verteiler Einbaukästen  
Caja empotrable

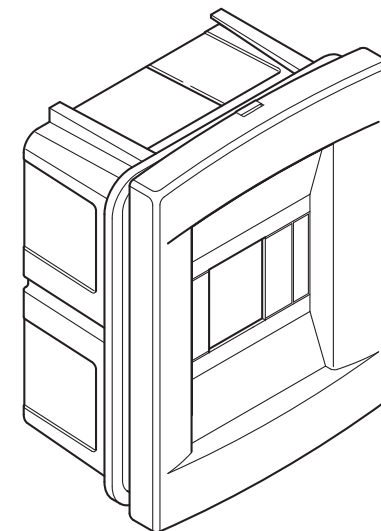

675.

**InfoTECH**

ITALY

WORLDWIDE

Numero Verde  
**800-018009**

Scame **OnLine**  
www.scame.com  
infotech@scame.com

