



**DC ISOLATORS**  
**ART. 590.DCGE0825**  
**590.DCGE0830**

WIRES RANGE AND TIGHTENING TORQUE	
Wire range	4 - 25mm <sup>2</sup>
Max Tightening torque	2Nm
Wire strip length	 10mm

**WARNING:**  
**INTERNAL**  
**CONTACTS SWITCH**  
**LINKING IS NEEDED**


**FOR A DIFFERENT**  
**INTERNAL CONTACTS**  
**SWITCH LINKING**  
**FOLLOW THE WIRING**  
**DIAGRAM OPTIONS**  
**SHOWN BELOW**

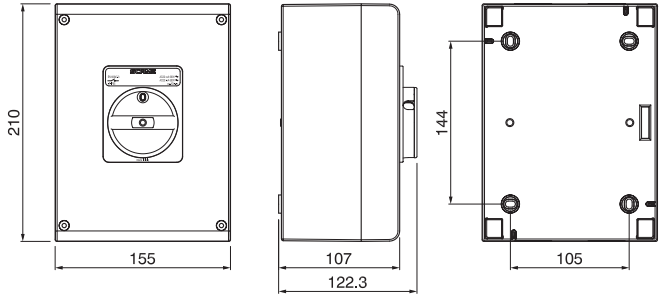


## POSSIBLE CONTACTS SWITCH LINKING

### 590.DCGE0825 (SINGLE STRING 2 POLES) - 6 CONTACTS IN SERIES (4+2) OR (3+3)

Provided pre-wired linking  
 Bottom incoming  
 and outgoing (4+2) series




Option 1  
 Top incoming  
 Bottom outgoing (3+3) series




### 590.DCGE0830 - 590.DCGE0840 (SINGLE STRING 2 POLES) - 8 CONTACTS IN SERIES (4+4) OR (7+1)

Provided pre-wired  
 Bottom incoming  
 and outgoing (4+4) series






Option 1  
 Top incoming  
 Bottom outgoing (7+1) series



ART. 590.DCGE0840

WIRES RANGE AND TIGHTENING TORQUE	
Wire range	10-70mm <sup>2</sup>
Max Tightening torque	6Nm
Wire strip lenght	13mm

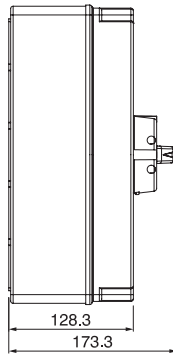

InfoTECH

<b>ITALY</b> Numero Verde <span style="font-size: 1.2em; font-weight: bold;">800-018009</span>	<b>WORLDWIDE</b> <b>ScameOnLine</b> <a href="http://www.scame.com">www.scame.com</a> <a href="mailto:infotech@scame.com">infotech@scame.com</a>
--	--