





## DC ISOLATORS

**ART. 590.DCGE0825**  
**590.DCGE0830**

**WARNING:**  
**INTERNAL**  
**CONTACTS SWITCH**  
**LINKING IS NEEDED**

**FOR A DIFFERENT**  
**INTERNAL CONTACTS**  
**SWITCH LINKING**  
**FOLLOW THE WIRING**  
**DIAGRAM OPTIONS**  
**SHOWN BELOW**





### POSSIBLE CONTACTS SWITCH LINKING

**590.DCGE0825**

**(SINGLE STRING 2 POLES) - 6 CONTACTS IN SERIES (4+2) OR (3+3)**

Provided pre-wired linking  
Bottom incoming  
and outgoing (4+2) series

Option 1  
Top incoming  
Bottom outgoing (3+3) series





**590.DCGE0830 - 590.DCGE0840**

**(SINGLE STRING 2 POLES) - 8 CONTACTS IN SERIES (4+4) OR (7+1)**


Provided pre-wired  
Bottom incoming  
and outgoing (4+4) series




Option 1  
Top incoming  
Bottom outgoing (7+1) series



## ART. 590.DCGE0840

### WIRES RANGE AND TIGHTENING TORQUE

Wire range	10-70mm <sup>2</sup>
Max Tightening torque	6Nm
Wire strip length 	13mm

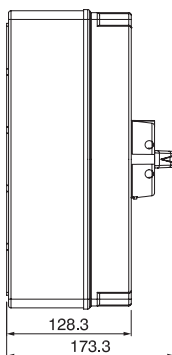

### InfoTECH

ITALY

WORLDWIDE

Numero Verde  
**800-018009**

ScameOnLine  
www.scame.com  
infotech@scame.com