

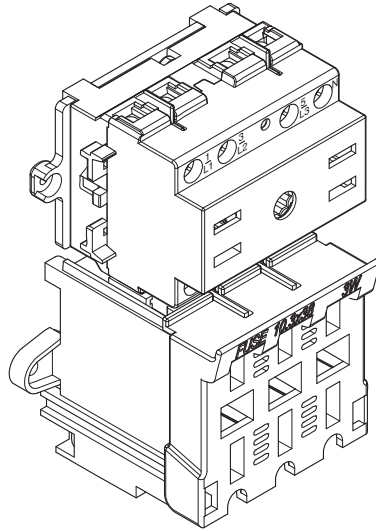




**ENCLOSED FUSES SWITCH DISCONNECTOR**

**16÷32A**  
**2P-3P-3P+N-4P**



		<b>16÷32A</b> <b>2P-3P-3P+N-4P</b>
Wire range		1.5÷10mm <sup>2</sup>
Tightening torque	Terminal screws	0.8Nm
	Fixing screws	1.2Nm
Wire strip length		10mm



**InfoTECH**

ITALY WORLDWIDE


Numero Verde **800-018009**

ScameOnLine  
www.scame.com  
infotech@scame.com





**ATTENTION** When mounting or removing additional elements the switch **has to be in OFF position** for avoiding damages to mechanism. When removing main switch following instruction for avoiding damages.

**ENCLOSED FUSES SWITCH DISCONNECTOR**

**16÷32A**  
**2P-3P-3P+N-4P**

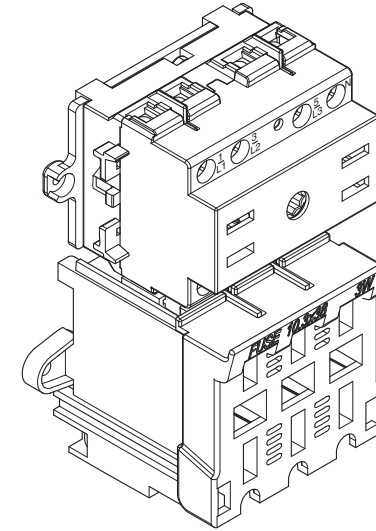

		<b>16÷32A</b> <b>2P-3P-3P+N-4P</b>
Wire range		1.5÷10mm <sup>2</sup>
Tightening torque	Terminal screws	0.8Nm
	Fixing screws	1.2Nm
Wire strip length		10mm



**InfoTECH**

ITALY WORLDWIDE


Numero Verde **800-018009**

ScameOnLine  
www.scame.com  
infotech@scame.com

**ATTENTION** When mounting or removing additional elements the switch **has to be in OFF position** for avoiding damages to mechanism. When removing main switch following instruction for avoiding damages.

THERMOPLASTIC ENCLOSURES


16÷32A  
2P-3P-3P+N-4P

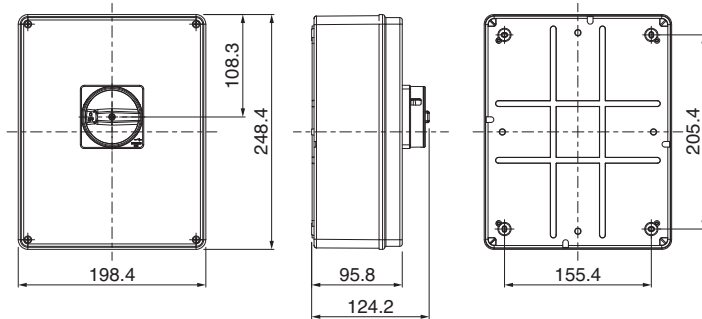

Rated current (A)	Nr of poles	Enclosure dimensions	Cable entries
16-32	2-3-3P+N-4P	240x190x125	blank side

ALUMINIUM ENCLOSURES


16÷32A  
2P-3P-3P+N-4P

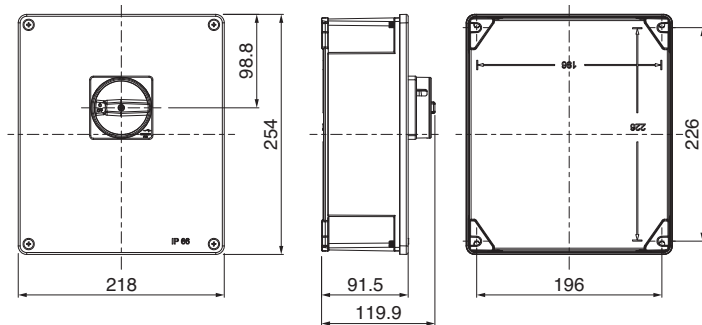

Rated current (A)	Nr of poles	Enclosure dimensions	Cable entries
16-32	2-3-3P+N-4P	253x219x93	blank side

THERMOPLASTIC ENCLOSURES


16÷32A  
2P-3P-3P+N-4P

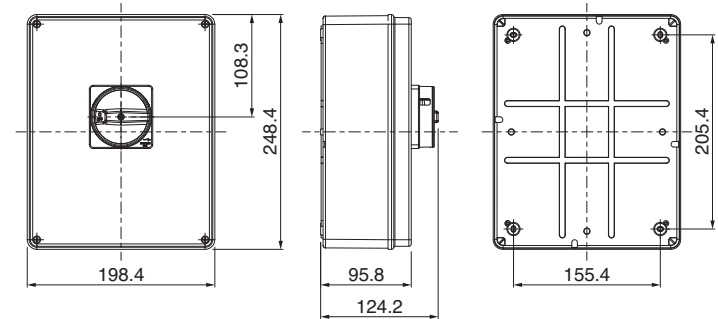

Rated current (A)	Nr of poles	Enclosure dimensions	Cable entries
16-32	2-3-3P+N-4P	240x190x125	blank side

ALUMINIUM ENCLOSURES

16÷32A  
2P-3P-3P+N-4P

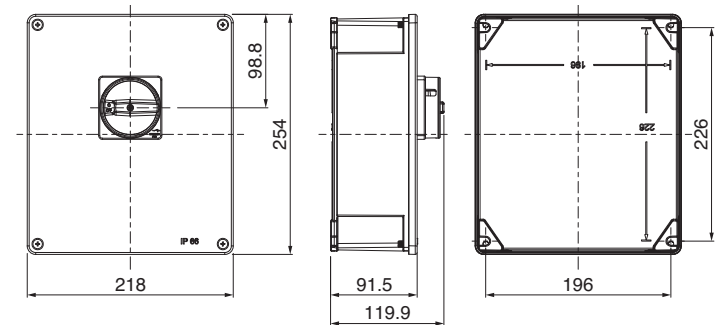

Rated current (A)	Nr of poles	Enclosure dimensions	Cable entries
16-32	2-3-3P+N-4P	253x219x93	blank side