
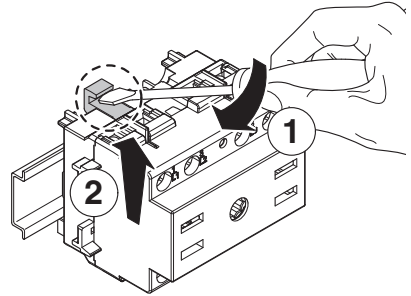


## ENCLOSED SWITCH-DISCONNECTORS - 80A 450VDC 4 poles In series




		<b>20÷40A - 2P-3P-3P+N-4P</b>
Wire range		1.5÷10mm <sup>2</sup>
Tightening torque	Terminal screws	0.8Nm
	Fixing screws	1.2Nm
Wire strip length		10mm

### POSSIBLE CONTACTS SWITCH LINKING


#### 590.DCGE0416

#### (SINGLE STRING 2 POLES) - 4 CONTACTS IN SERIES (2+2) OR (3+1)


Provided pre-wired linking  
Bottom incoming  
and outgoing (2+2) series



Option 1  
Top incoming  
Bottom outgoing (3+1) series



Option 2  
Top incoming  
and outgoing (2+2) series



### InfoTECH

ITALY

WORLDWIDE

Numero Verde

**800-018009**

ScameOnLine

www.scame.com  
infotech@scame.com



### ATTENTION

When mounting or removing additional elements the switch **has to be in OFF position** for avoiding damages to mechanism.

When removing main switch following instruction for avoiding damages.