

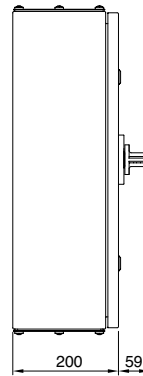
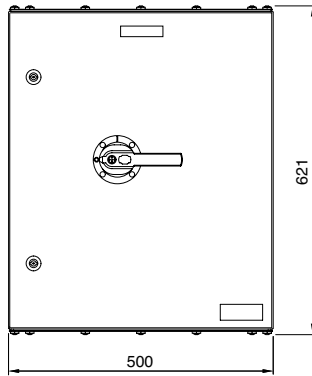


**FIRE RATED ENCLOSED
SWITCH-DISCONNECTORS 200÷630A
3P-3P+N-6P**

**200A-250A
3P-3P+N**

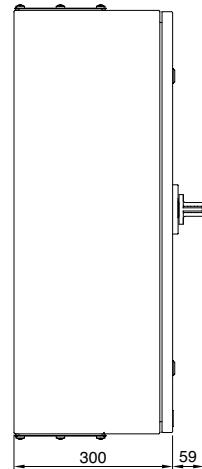

200A-250A 6P

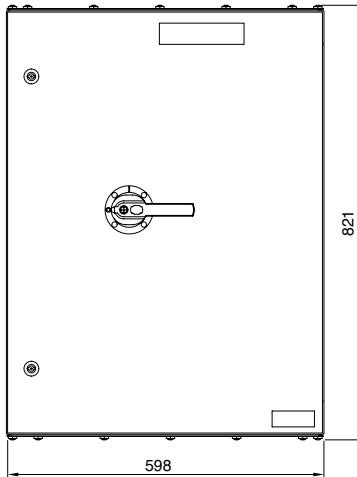

InfoTECH

ITALY

WORLDWIDE

Numero Verde



800-018009

ScameOnLine



www.scame.com

infotech@scame.com




315A-400A 3P-3P+N

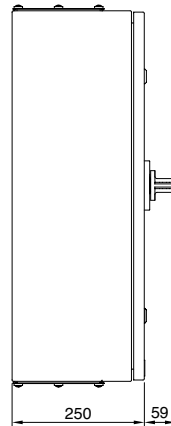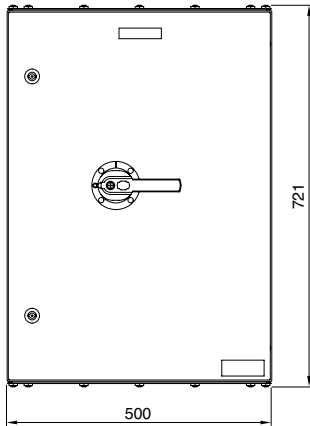

**315A-400A 6P
630A 3P-3P+N**

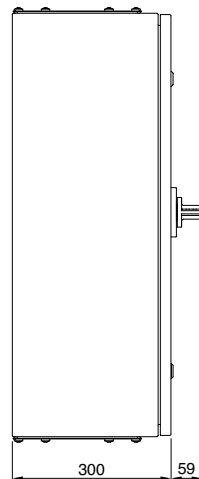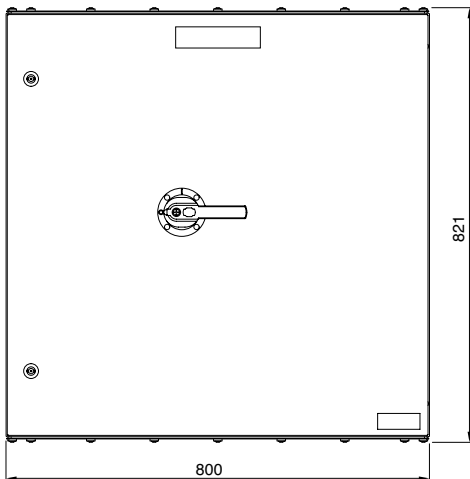

630A 6P

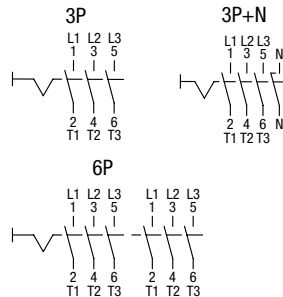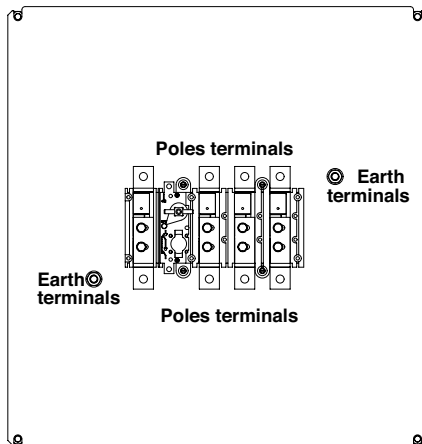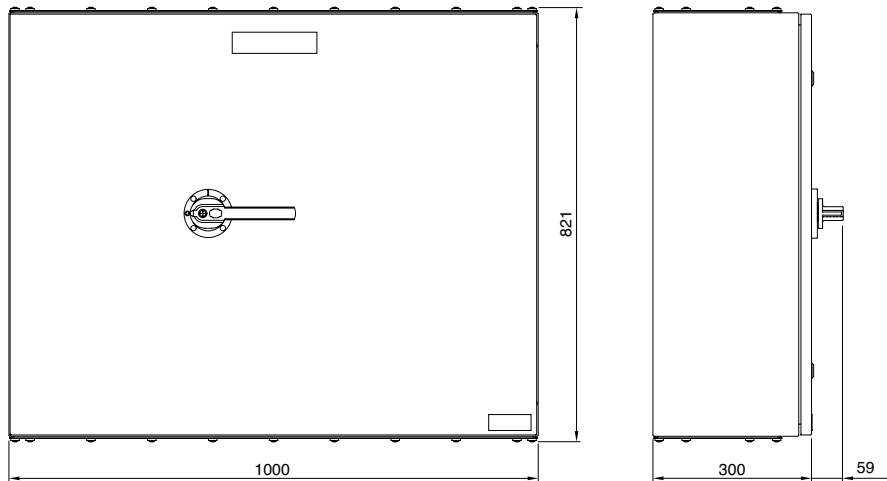

ATTENTION

When mounting or removing additional elements the switch **has to be in OFF position** for avoiding damages to mechanism. When removing main switch following instruction for avoiding damages.

		200A-250A-315A-400A 3P-3P+N	630A 3P-3P+N	200A 6P	250A-315A-400A 6P	630A 6P
Terminal type		Lug/Bar	Lug/Bar	Lug/Bar	Lug/Bar	Lug/Bar
Bolt Size	Poles terminals	M10	M12	M8	M10	M12
	Earth terminals	M10	M12	M10	M10	M12
Min tightening torque		10 Nm	14 Nm	6 Nm	10 Nm	14 Nm

