



## ENCLOSED SWITCH-DISCONNECTORS

20÷80A

2P-3P-3P+N-4P



20÷40A

2P-3P-3P+N-4P

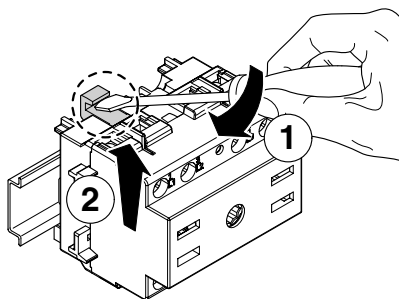

63÷80A

2P-3P-3P+N-4P

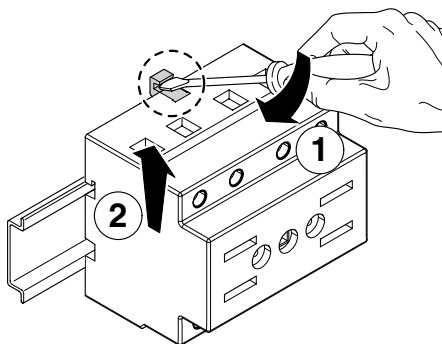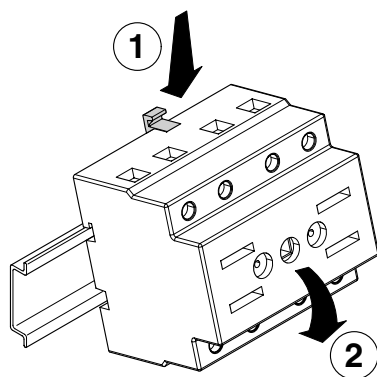

### InfoTECH

ITALY

WORLDWIDE


Numero Verde





800-018009

ScameOnLine

www.scame.com

infotech@scame.com

|                   |   | 20÷40A<br>2P-3P-3P+N-4P | 63÷80A<br>2P-3P-3P+N-4P |
|-------------------|---|-------------------------|-------------------------|
| Wire range        |   | 1.5÷10mm <sup>2</sup>   | 10-35mm <sup>2</sup>    |
| Tightening torque | Terminal screws   | 0.8Nm                   | 3.6Nm                   |
|                   | Fixing screws   | 1.2Nm                   | 1.2Nm                   |
| Wire strip length |  | 10mm                    | 13mm                    |







 **ATTENTION**

When mounting or removing additional elements the switch **has to be in OFF position** for avoiding damages to mechanism.






When removing main switch following instruction for avoiding damages.

## THERMOPLASTIC ENCLOSURES

**20÷40A**  
**2P-3P-3P+N-4P**

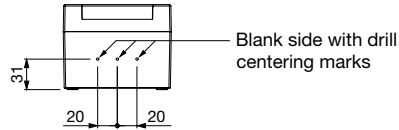
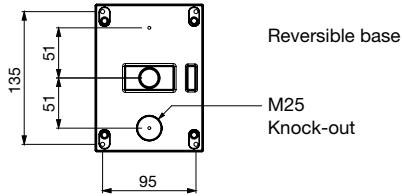
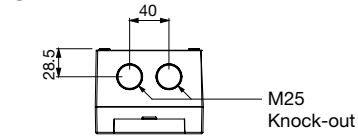



**63-80A**  
**2P-3P-3P+N-4P**

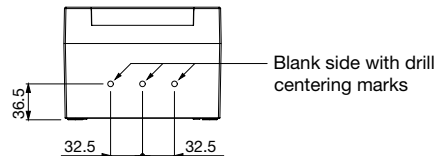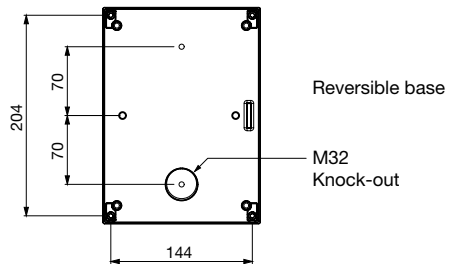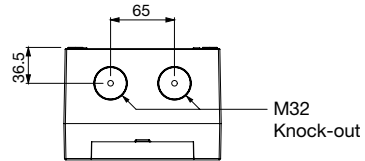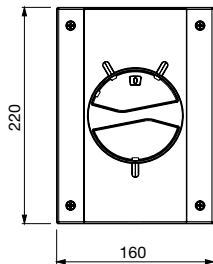

## ALUMINIUM ENCLOSURES

**20÷40A**  
**2P-3P-3P+N-4P**

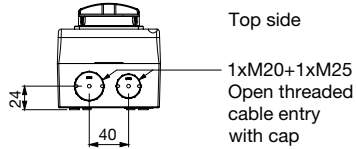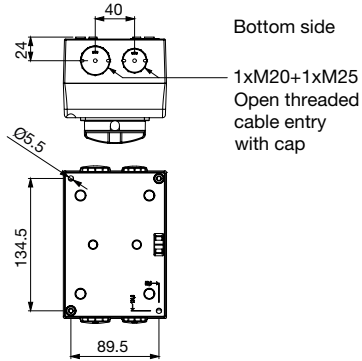

**63-80A**  
**2P-3P-3P+N-4P**

