

> TV/SAT OUTLETS (Ø 9,5mm)



> VERSIONS

- TV outlets Male  
- Direct  
- Terminal  
- Attenuation 12 dB
- TV outlets Female  
- Direct  
- Terminal  
- Attenuation 12 dB
- Coax/sat/cat. F outlets  
- Direct
- TV/SAT outlets

> REFERENCE STANDARDS

- EN 50083**  
Communal aerial installations
- IEC 60169**  
Radio-frequency connectors

> QUALITY MARKS




> TECHNICAL CHARACTERISTICS

Frequency:	<b>TV: 5-862 Mhz</b> <b>SAT: 950-2400 Mhz</b>
Protection degree:	<b>IP20D</b>
Operating temperature according to the reference standard:	<b>-15°C+35°C</b>
Max. operating temperature:	<b>60°C</b>
Material:	<b>Engineering plastic</b>
Halogen free:	<b>Yes</b>
Colour:	<b>Anthracite pantone 432</b> <b>White RAL 9010</b> <b>Grey RAL 7035</b>

> BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Not Resistant	Limited Resistance	Limited Resistance	Not Resistant	Not Resistant	Not Resistant	Limited Resistance	Limited Resistance	Resistant

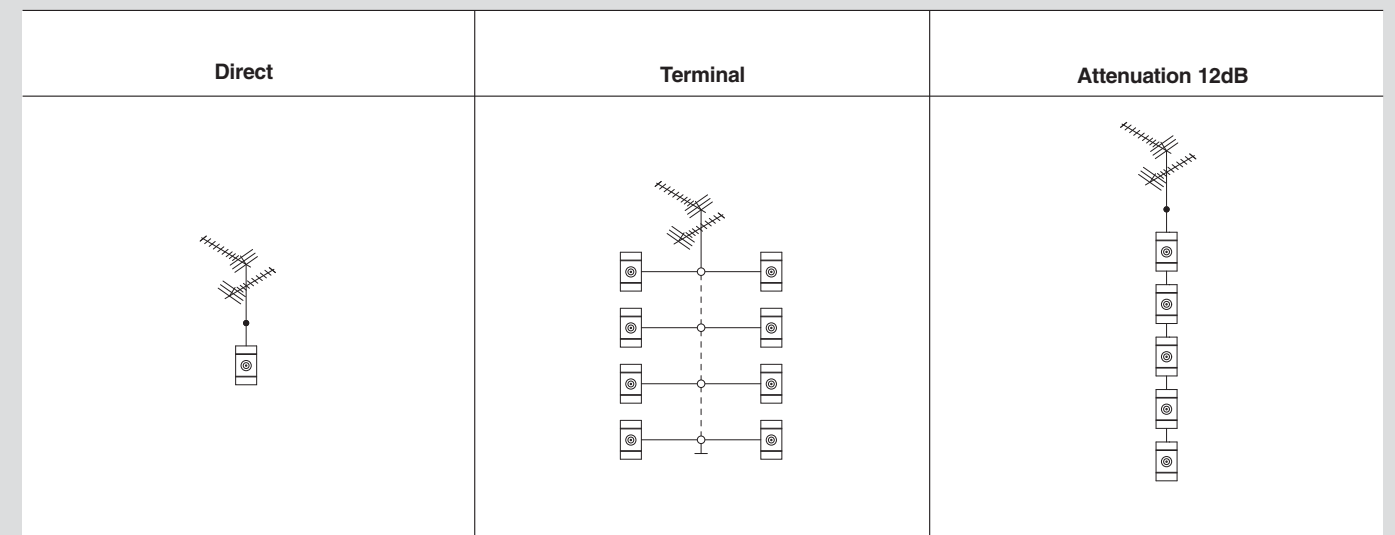

> APPLICATION EXAMPLES

