


> DISTRIBUTION ASSEMBLIES



> VERSIONS

- Distribution assemblies
  - Portable
  - With cable and plug
- Two-front units distribution assemblies
  - 3+3 socket outlets
  - 4+4 socket outlets

> DIMENSIONS

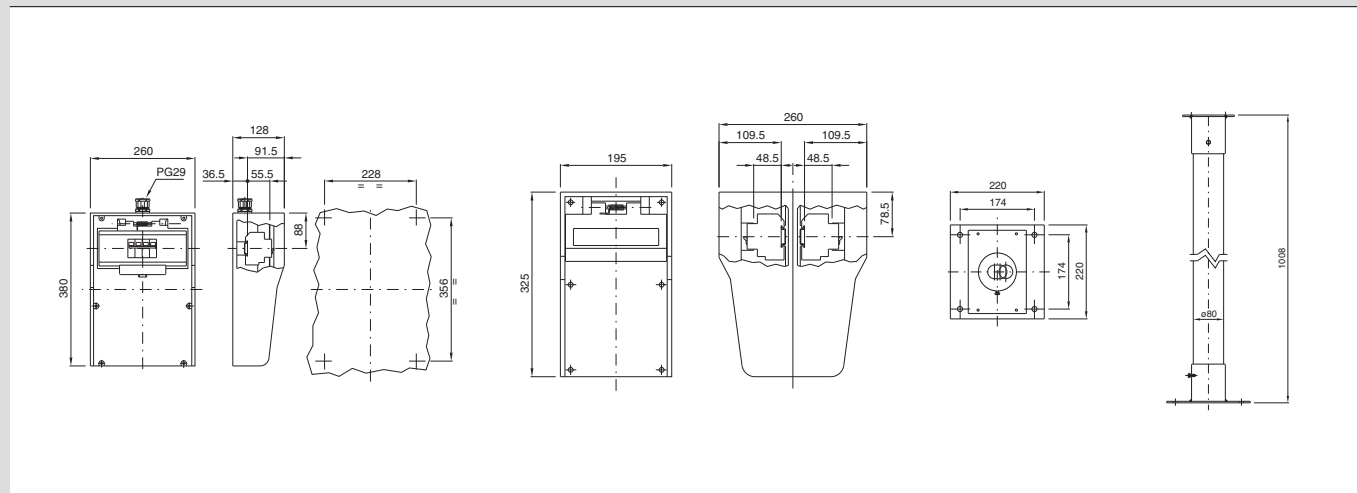

> REFERENCE STANDARDS

- EN 60670-1**  
Boxes and enclosures for electrical accessories for household and similar fixed electrical installation  
*Part 1: general requirements*
- EN 60439-1**  
Assembled protective and control equipment for low voltages (BT boards)  
*Part 1: prescriptions for mass production equipment (AS) and custom-made equipment (ANS)*
- EN 60439-4**  
Assembled protective and control equipment for low voltages (BT boards)  
*Part 4: special prescriptions for assembled equipment during works (ASC)*

> TECHNICAL CHARACTERISTICS

Protection degree:	<b>IP44</b>
Operating temperature according to the reference standard:	<b>-25°C+40°C</b>
Max operating temperature:	<b>60°C</b>
Glow Wire test:	<b>960°C</b>
IK degree at 20°C:	<b>IK09 (distribution assemblies) IK10 (empty units)</b>
Terminal blocks fixing possibility:	<b>Yes</b>
DIN rail fixing:	<b>Yes</b>
Power output:	<b>max. 18KW</b>
Material:	<b>Rubber</b>
Colour:	<b>Black</b>

> BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS (DISTRIBUTION ASSEMBLIES)

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Not Resistant	Not Resistant	Not Resistant	Limited Resistance	Resistant	Resistant

> BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS (EMPTY UNITS)

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

> APPLICATION EXAMPLES

