


ENERBOX Series

■ DISTRIBUTION ASSEMBLIES



■ VERSIONS

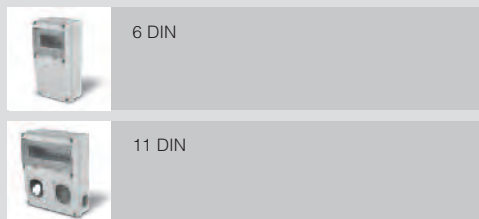

Left and right side knockouts for DOMO Series (flange 50x60mm).

■ REFERENCE STANDARDS

EN 60670-1
Boxes and enclosures for electrical accessories for household and similar fixed electrical installations.
Part 1: general requirements.

EN 60670-24
Boxes and enclosures for electrical accessories for household and similar fixed electrical installations.
Part 24: particular requirements for enclosures for housing protective devices and other power dissipating electrical equipment.

■ TECHNICAL CHARACTERISTICS

| | |
|--|---------------------------------------|
| Rated current: | IP55 |
| Operating ambient temperature according to the reference standard: | -25°C +35°C |
| Max. operating ambient temperature: | 60°C |
| Glow Wire test: | 650°C |
| Material: | Engineering plastic |
| IK degree at 20°C: | IK08 |
| Cable inlet: | PG16-PG21-PG29 |
| Insulation class: | Class II (double insulation) □ |
| Dissipable power according to CEI 23-49 standard: | 9-15W |
| Colour: | Grey RAL7035 |

■ BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids | | Bases | | Solvents | | | | Mineral oil | UV rays |
|-----------------|--------------------|-----------|--------------------|-----------|-----------|---------------|---------------|-----------|---------------|--------------------|
| | Concentrated | Diluted | Concentrated | Diluted | Hexane | Benzol | Acetone | Alcohol | | |
| Resistant | Limited Resistance | Resistant | Limited Resistance | Resistant | Resistant | Not Resistant | Not Resistant | Resistant | Not Resistant | Limited Resistance |

■ APPLICATION EXAMPLES

