

> TV/SAT OUTLETS (Ø 9,5mm)



> VERSIONS

	TV outlets Male - Direct - Terminal - Attenuation 12 dB
	TV outlets Female - Direct - Terminal - Attenuation 12 dB
	Coax/sat/cat. F outlets - Direct
	TV/SAT outlets

> REFERENCE STANDARDS

EN 50083
Communal aerial installations

IEC 60169
Radio-frequency connectors

> QUALITY MARKS




> TECHNICAL CHARACTERISTICS

Frequency:	TV: 5-862 Mhz SAT: 950-2400 Mhz
Protection degree:	IP20D
Operating temperature according to the reference standard:	-15°C+35°C
Max. operating temperature:	60°C
Material:	Engineering plastic
Halogen free:	Yes
Colour:	Anthracite pantone 432 White RAL 9010 Grey RAL 7035

> BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Not Resistant	Limited Resistance	Limited Resistance	Not Resistant	Not Resistant	Not Resistant	Limited Resistance	Limited Resistance	Resistant

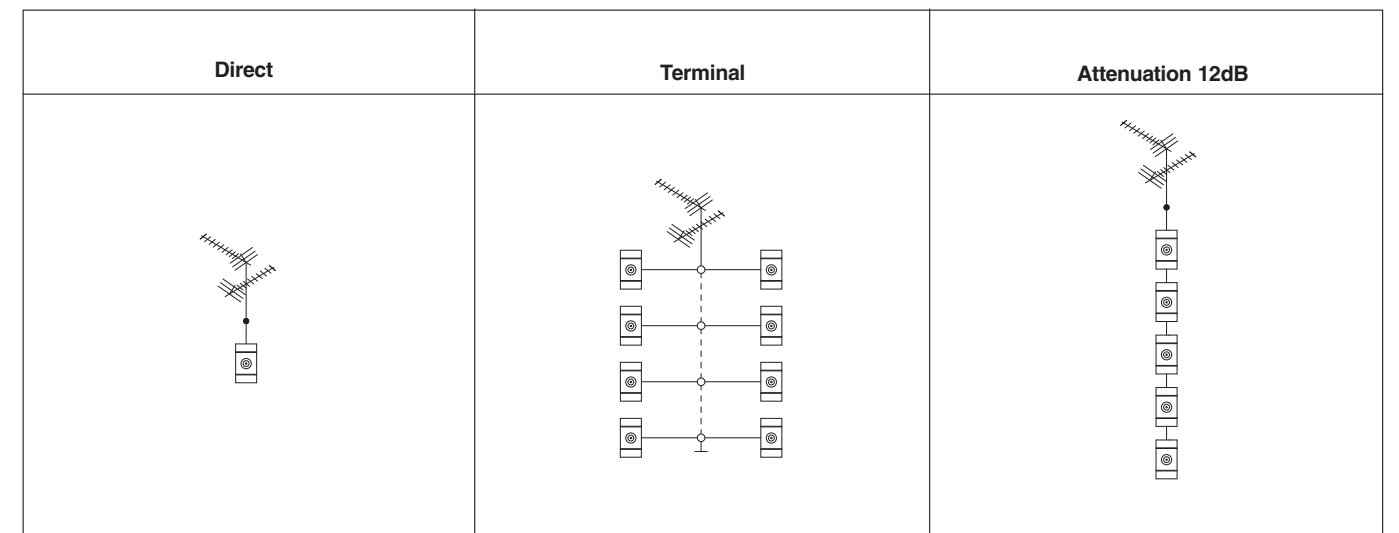

> APPLICATION EXAMPLES

