

## > SWITCHED SOCKET OUTLETS



## > REFERENCE STANDARDS

**BS 1363-2**  
13A plugs, socket-outlets and adaptors.  
Specification for 13A switched and unswitched socket-outlets.

**BS 546**  
Two-pole and Earthing-Pin plugs, socket-outlets and socket-outlet adaptors for AC (50-60 Hz) circuit up to 250V.

## > QUALITY MARKS



## > VERSIONS

	Single switchsocket 13A
	Double switchsocket 13A
	Single switchsocket 15A

## > TECHNICAL CHARACTERISTICS

Rated current:	<b>13A - 15A</b>
Rated voltage:	<b>250V~</b>
Frequency:	<b>50Hz</b>
Insulating voltage:	<b>250V~</b>
Protection degree:	<b>IP20D</b>
Operating temperature according to the reference standard:	<b>-5°C+40°C</b>
Max. operating temperature:	<b>+60°C</b>
Glow Wire test:	<b>850°C</b>
Max. installation altitude:	<b>2.000 m</b>
Cabling capacity of the terminals:	<b>3x2,5mm<sup>2</sup> 3x4mm<sup>2</sup> 2x6mm<sup>2</sup> (stranded)</b>
Mounting box type:	<b>Flush 1-2 gang (min. deepness: 25mm-35mm for 15A) Surface 1-2 gang (min. deepness: 25mm-35mm for 15A)</b>
Material:	<b>Engineering plastic</b>
Colour:	<b>White RAL 9016</b>

## > BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS


Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Limited Resistance	Resistant

## > APPLICATION EXAMPLES




> DIMENSIONS


COD. 103.4011

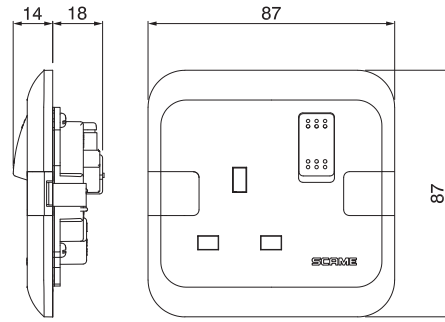


COD. 103.4041

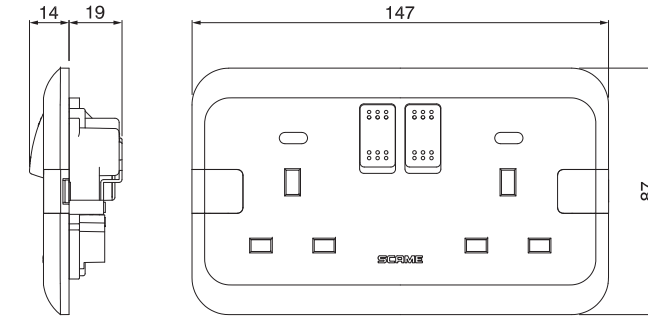


COD. 103.4021

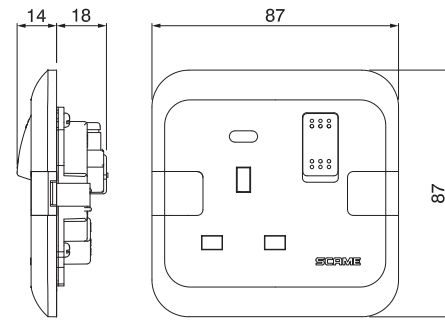


COD. 103.4061

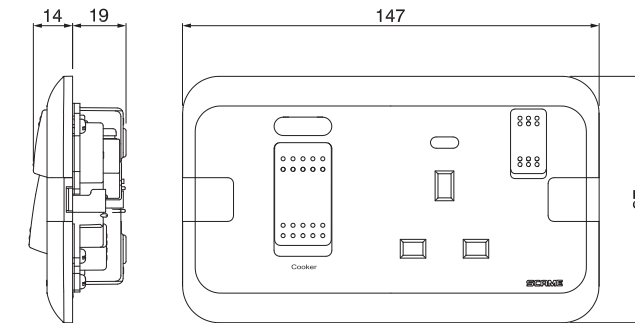

COD. 103.4031

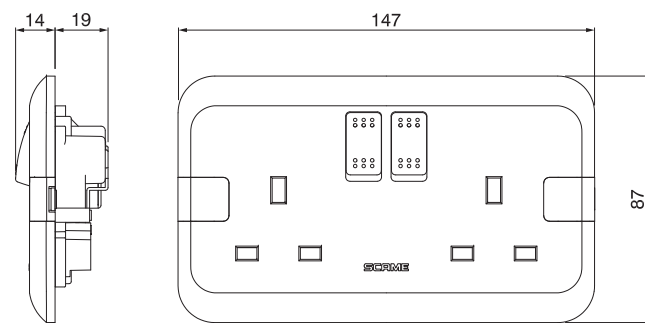

COD. 103.4111

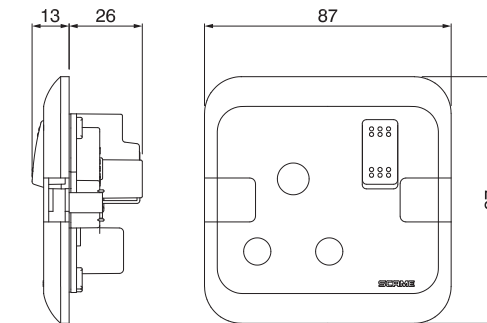

(Dimensioni in mm)

(Dimensioni in mm)