


## > CABLE TIES



## > VERSIONS

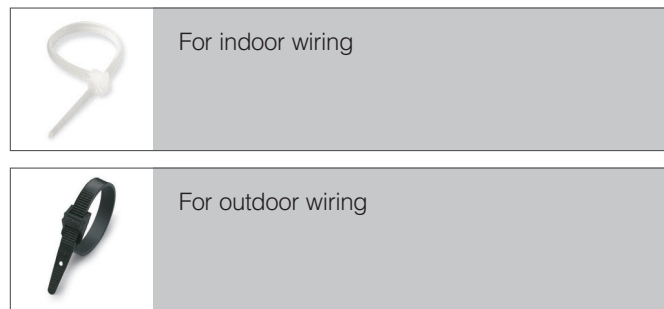

## > TECHNICAL CHARACTERISTICS

Operating temperature:	-40°C+85°C for indoor wiring -40°C+80°C for outdoor wiring
Installation temperature:	-10°C+60°C for indoor wiring -20°C+60°C for outdoor wiring
Glow Wire test:	650°C
Material:	PA 6.6 (Indoor wiring) PA 12 (outdoor wiring)
Colour:	Black Natural
IK degree at 20°C:	IK08-IK10

## > BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not Resistant	Not Resistant	Limited Resistance	Resistant	Resistant	Resistant	Resistant	Resistance	Resistant	Resistant

## > DIMENSIONS


### Cable ties for indoor wiring

DIMENSIONS (mm)	GRIP CAPACITY MIN ÷ MAX Ø mm	TENSILE STRENGTH kg
2.4x75	1.5 ÷ 15	6
2.5x95	1.5 ÷ 18	8
2.5x135	1.5 ÷ 30	8
2.5x160	1.5 ÷ 40	8
2.5x200	1.5 ÷ 50	8
3.6x140	1.5 ÷ 35	13
3.6x200	1.5 ÷ 50	13
3.6x290	1.5 ÷ 80	13
3.6x365	1.5 ÷ 100	13
4.8x180	1.5 ÷ 45	22
4.8x200	1.5 ÷ 45	22
4.8x250	1.5 ÷ 60	22
4.8x290	1.5 ÷ 75	22
4.8x360	1.5 ÷ 100	22
4.8x130	1.5 ÷ 110	22
7.6x180	4.5 ÷ 45	55
7.6x300	4.5 ÷ 80	55
7.6x365	4.5 ÷ 100	55
9x780	4.5 ÷ 230	55

### Cable ties for outdoor wiring

DIMENSIONS (mm)	GRIP CAPACITY MIN ÷ MAX Ø mm	TENSILE STRENGTH kg
6x115	4 ÷ 25	25
6x175	10 ÷ 45	28
9x120	4 ÷ 22	48
9x180	10 ÷ 42	48
9x265	30 ÷ 60	51
9x360	30 ÷ 93	51

## > LOADING DIAGRAM

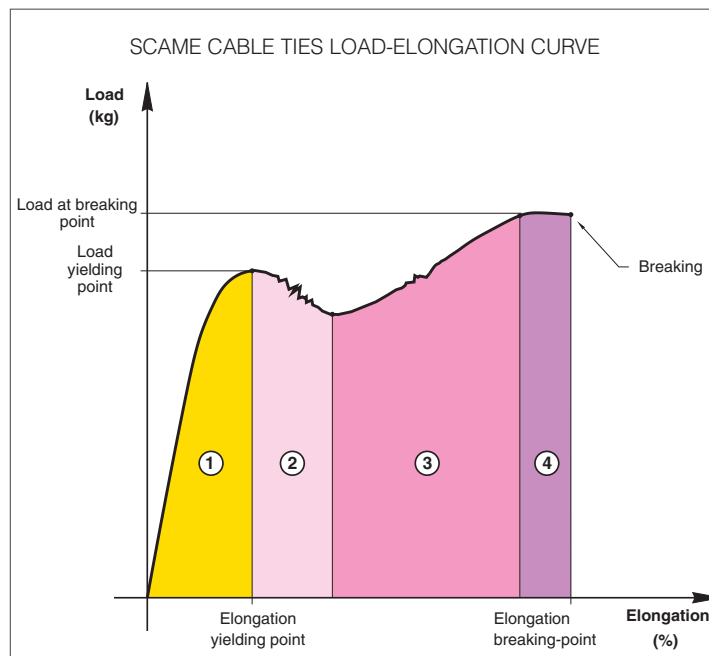

## > APPLICATION EXAMPLES

