


ENERBOX Series

■ DISTRIBUTION ASSEMBLIES



■ VERSIONS

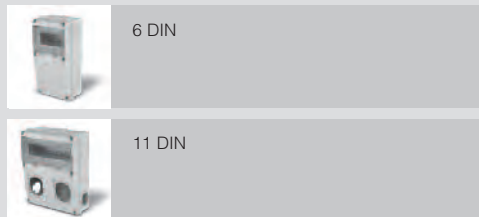

Left and right side knockouts for DOMO Series (flange 50x60mm).

■ REFERENCE STANDARDS

EN 60670-1
Boxes and enclosures for electrical accessories for household and similar fixed electrical installations.
Part 1: general requirements.

EN 60670-24
Boxes and enclosures for electrical accessories for household and similar fixed electrical installations.
Part 24: particular requirements for enclosures for housing protective devices and other power dissipating electrical equipment.

■ TECHNICAL CHARACTERISTICS

Rated current:	IP55
Operating ambient temperature according to the reference standard:	-25°C +35°C
Max. operating ambient temperature:	60°C
Glow Wire test:	650°C
Material:	Engineering plastic
IK degree at 20°C:	IK08
Cable inlet:	PG16-PG21-PG29
Insulation class:	Class II (double insulation) □
Dissipable power according to CEI 23-49 standard:	9-15W
Colour:	Grey RAL7035

■ BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited Resistance	Resistant	Limited Resistance	Resistant	Resistant	Not Resistant	Not Resistant	Resistant	Not Resistant	Limited Resistance

■ APPLICATION EXAMPLES

