


DISTRIBUTION ASSEMBLY Kiosk	
RATED VOLTAGE (V) V <sub>n</sub> = 400	
RATED CURRENT (A) I <sub>n</sub> = 32	
RATED FREQUENCY (Hz) f <sub>n</sub> = 50-60	
PROTECTION DEGREE IP56	
REFERENCE STANDARD EN 61439-7	



CIRCUIT		1	2	3	4	5	6	7						
COMPONENTS DESCRIPTION		Earth	Main Supply	Supply Illumination	Illumination									
PROTECTION DEVICES	TYPE					SEZ	MCB/RCD	MCB/RCD						
	Un (V)					400	230	230						
	In (A)					63	32	32						
	N°POLES					4	1P+N	1P+N						
	CHARACTERISTICS						"C+AC"	"C+AC"						
BREAKING CAPACITY (kA)														
Idn (mA)							30	30						
PLUGS AND SOCKETS	TYPE						IEC 309	IEC 309						
	Un (V)						200 - 250	200 - 250						
	In (A)						32	32						
	N°POLES						2P+T	2P+T						
	CONFIGURATIONS						6h	6h						
SCAME PART NUMBER							418.3263	418.3263						
TERMINALS		N° SECTION (mmq)	16	4x10										
CONNECTION		L1, L2, L3, N, PE	PE	L1,L2,L3,N	L1,N	L1,N	L1,L2,L3,N	L1,N,PE	L2,N,PE					
		SEZ. (mmq)	10	10	2,5	2,5	10	4	4					
OTHER COMPONENTS														

DATE	15/05/2014
DISEG.	F.Verzeroli
VISTO	G.Gozzini
REV.	VERSION
DATE	SIGNATURE
APPR.	G.Gozzini

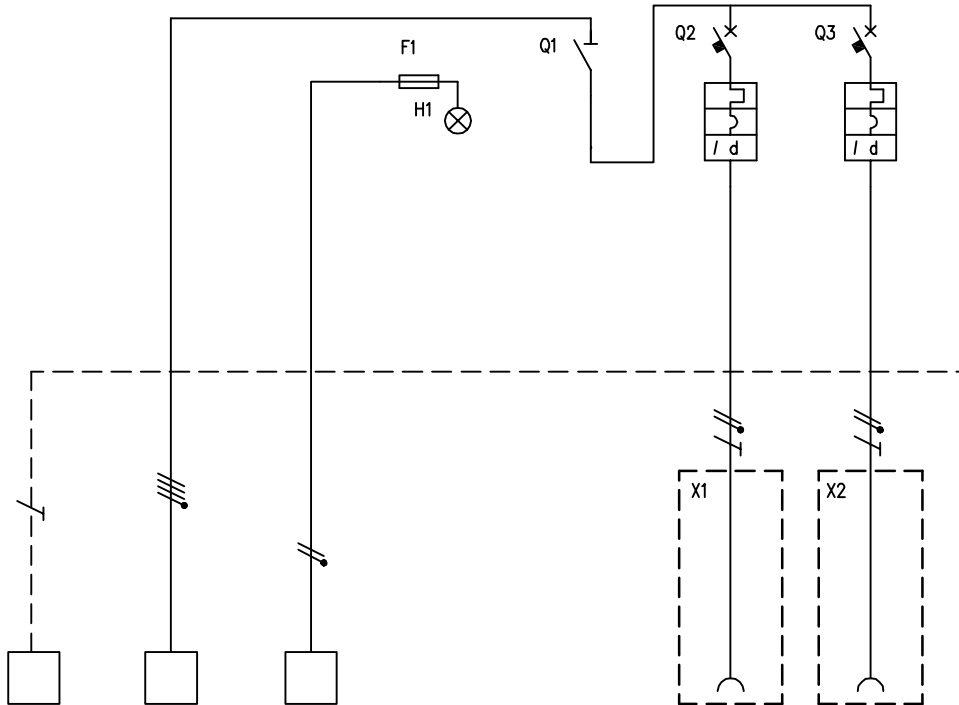

For legal terms we reserve the property of this drawing with interdiction of reproduction and disclosing to third parties or to competitors