

Printview: 2-conductor Ex e II center terminal block; required between end plate and end terminal block for terminal strips with fixing flanges; suitable for Ex e II applications - Item No.: 264-131



2-conductor Ex e II center terminal block; required between end plate and end terminal block for terminal strips with fixing flanges; suitable for Ex e II applications

Item No.: 264-131



2-conductor Ex e II center terminal block; required between end plate and end terminal block for terminal strips with fixing flanges; suitable for Ex e II applications

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	264-131
GTIN / EAN	4044918415071
Content	1
Order amount	100
Customer item number	

Notes

Technical data


Miscellaneous

Total number of connection points	2
Total number of potentials	1
Color	light gray
Rated current [A]	23 [A]
Rated voltage EN (Ex e II) [V]	690 [V]

Printview: 2-conductor Ex e II center terminal block; required between end plate and end terminal block for terminal strips with fixing flanges; suitable for Ex e II applications - Item No.: 264-131

Technical data	
Number of levels	1
Connection technology	CAGE CLAMP®
Number of connection points connector	2
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 Inch
Note (conductor cross-section)	12 AWG: THHN, THWN
Type of wiring	Front-entry wiring
Design	horizontal
Marking level	Center marking
Fire load [MJ]	0.073 [MJ]
Weight [g]	3.787 [g]
Width	6 mm / 0.236 Inch
Height from the surface	22.1 mm / 0.87 Inch
Depth	32 mm / 1.26 Inch
Mounting type	Mounting flange

Images & drawings

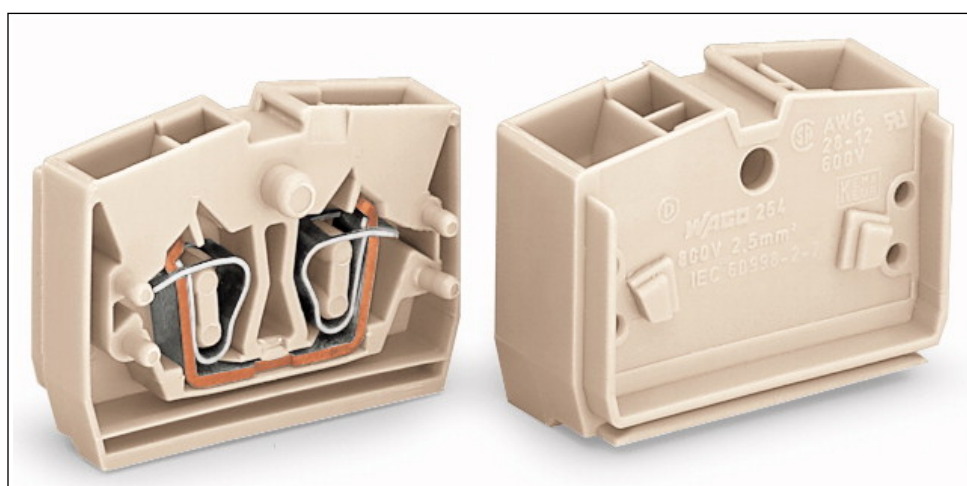

Printview: 2-conductor Ex e II center terminal block; required between end plate and end terminal block for terminal strips with fixing flanges; suitable for Ex e II applications - Item No.: 264-131

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.